CONNECTION AND SETUP GUIDE

Kit ECGSOLAX HVM 5kW 24V WiFi + EKPAOWE 25.6V 100Ah 2560Wh

Inverter ECGSOLAX HVM 5kW 24V WiFi + battery EKPAOWE 25.6V 100Ah 2560Wh




Kit contents

- **Inverter ECGSOLAX HVM 5kW 24V WiFi**
- **Battery EKPAOWE 25.6V 100Ah 2560Wh**

What else you will need


- Battery–inverter power cables 50 mm², M8 lugs
- DC breaker / fuse 250 A
- 40 A breaker, 6 mm² cable to the grid input
- Screwdriver, 13 mm wrench, multimeter

Wiring diagram

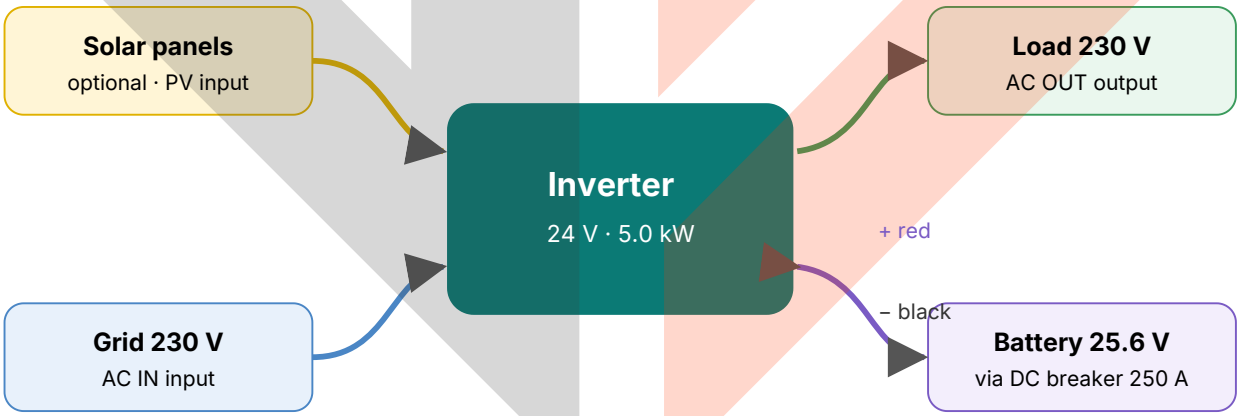

minertech.org · MinerTech® trademark · © 2017–2026, all rights reserved
+38 093 293 93 93 · +38 099 054 40 38 · Specialist Pavlo Leonidovych · strooks@gmail.com

Inverter connectors: bottom panel

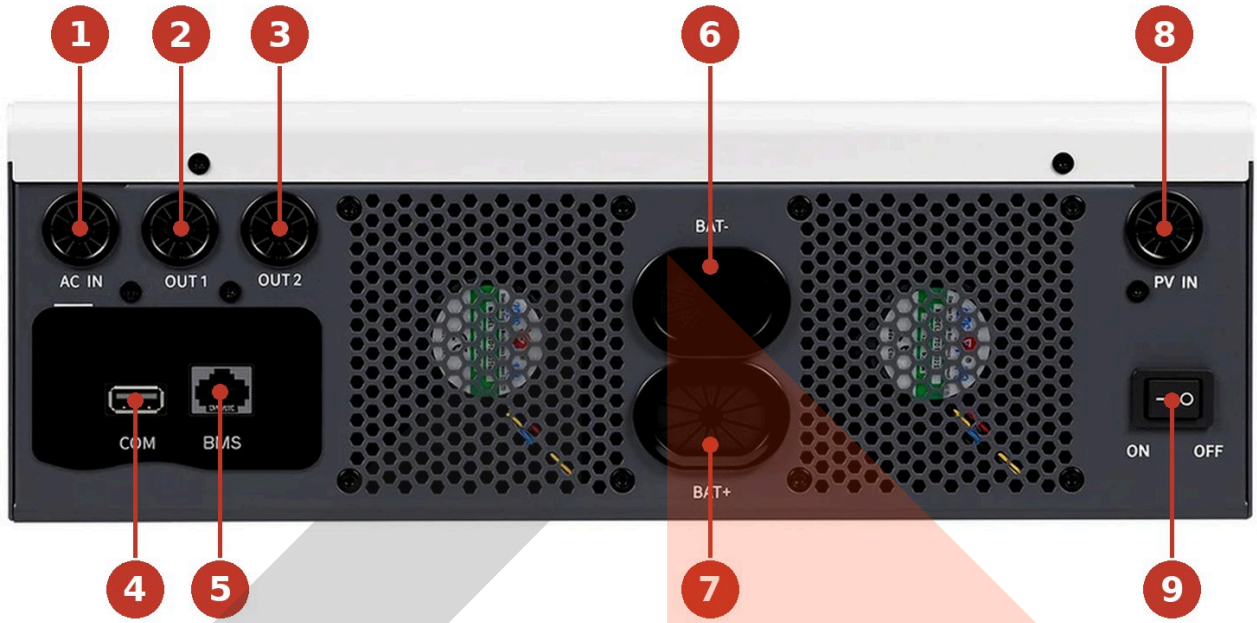

№	Connector	What it is	What connects where
1	**AC IN**	Grid or generator input (L, N, PE)	Cable from the grid through a separate 40 A breaker. A generator also connects here, item 04 = GEN
2	**OUT1**	Main AC output 230 V	Cable to the load panel (L, N)
3	**OUT2**	Second AC output; it can be switched off automatically by battery voltage, discharge time or SOC (items 38– 40)	Cable to less important loads (L, N)
4	**COM**	Communication port (USB connector)	For a Wi-Fi module (stick); this model has built-in Wi-Fi
5	**BMS**	RJ45 port for communication with the lithium battery BMS, RS485 or CAN	Communication cable from the battery BMS; pinout: 1 — RS485B, 2 — RS485A, 4 — CANH, 5 — CANL; item 17 = FEL, item 44 = battery protocol
6	**BAT–**	Entry for the 24 V battery “minus” cable	Battery negative, 50 mm² cable
7	**BAT+**	Entry for the 24 V battery “plus” cable	Battery plus, 50 mm² cable via a 250 A fuse / isolator
8	**PV IN**	Solar panel cable entry to the PV+ and PV– terminals	Panels via a separate DC breaker; Voc up to 500 V, MPPT 60–450 V, start from 80 V, current up to 27 A
9	**ON / OFF**	Inverter power switch	Switch on after all connections are complete

minertech.org · MinerTech® trademark · © 2017–2026, all rights reserved
+38 093 293 93 93 · +38 099 054 40 38 · Specialist Pavlo Leonidovych · strooks@gmail.com

Key values for this kit

28.4 V charge voltage (20)	**27.2 V** float voltage (21)	**24.0 V** cut-off (19)
FEL battery type (17)	**50 A** max. charge current (07)	**30 A** grid charging (06)

Connection procedure

1. Mount the inverter vertically on a non-combustible wall in a dry place. Leave at least 20 cm of free space above and below for cooling.
2. Make sure everything is switched off: inverter button OFF, battery switch/button OFF, DC breaker off, 230 V grid not connected.
3. Install a **250 A** DC breaker or fuse between the battery and the inverter in the positive (red) wire.
4. Connect the power cables (cross-section at least **50 mm²**, M8 lugs): **red** from the battery “+” to the inverter “+ BAT”, **black** from the battery “−” to “− BAT”. Check the polarity twice: swapping “+” and “−” is guaranteed to damage the inverter.
5. Tighten the terminal bolts firmly (without stripping the thread) and fit the protective caps. A loose contact heats up and melts the terminals.
6. Switch on the battery (button or switch on the case, if any), then the DC breaker.
7. Switch on the inverter with the ON button. The battery voltage should appear on the display. Enter the settings from the table below.
8. Switch off the inverter and connect the 230 V grid to the **AC IN** terminals (L, N, PE) through a separate 40 A breaker.
9. Connect the load (your socket/distribution board) to the **AC OUT** terminals (L, N, PE). Never mix up AC IN and AC OUT: feeding grid power into the output damages the inverter.
10. If you have solar panels, connect them to the **PV** input last, observing polarity. The open-circuit voltage of the panels (Voc) rises in frosty weather: do not exceed the PV maximum on the inverter label.
11. Switch on the inverter and check: 230 V at the output, the battery charges from the grid (charging icon on the display), the lights stay on when the grid is off.

Important: power from the battery. The battery BMS is usually rated for 100 A continuous current (the exact value is on the battery label). That is ≈ **2.3 kW** of continuous load from the battery. The inverter delivers its full 5.0 kW when grid or solar power is available. If the battery “trips” during a power cut, reduce the number of powerful appliances switched on at the same time.

Inverter settings

Menu access: hold the **ENTER** button for 2 seconds. Use ▲/▼ to select the program number, ENTER, change the value, ENTER to save. Exit: **ESC.**

minertech.org · MinerTech® trademark · © 2017–2026, all rights reserved
+38 093 293 93 93 · +38 099 054 40 38 · Specialist Pavlo Leonidovych · strooks@gmail.com

№	Parameter	Value	Why
01	Output voltage	**230V**	Standard for Ukraine and Europe.
02	Output frequency	**50Hz**	Standard for Ukraine and Europe.
03	Output source priority	**“Grid first”** (no panels) or **PBG** (with panels)	“Grid first”: from the grid, battery kept full for power cuts. PBG: solar and battery first, the grid when they are not enough.
04	Input mode	**UPS** (grid) / **GEN** (generator)	UPS: fast switching for computers. GEN: power from a generator.
05	Charging source priority	**PNG** (solar + grid)	Charging from both solar and grid.
06	Grid charging current	**30 A**	Moderate grid charging, without overloading the wiring or the battery.
07	Maximum charging current (total)	**50 A**	Total solar + grid charging, safe for LiFePO4 100Ah. Do not set higher.
17	Battery type	**FEL** (LiFePO4)	Lithium iron phosphate. AGM / FLD are for lead-acid only.
44	BMS communication	**OFF**	No communication cable to the inverter.
20	Charge voltage (CV)	**28.4 V**	Standard for LiFePO4 8S (25.6 V).
21	Float voltage	**27.2 V**	The battery is not overcharged when it stays on the grid for a long time.
19	Cut-off voltage	**24.0 V**	The inverter cuts the output before the battery reaches BMS protection.
15	Switch to grid	**25.0 V**	When discharged to this voltage, the load switches to the grid.
16	Return to battery	**27.0 V**	After recharging to this voltage, the inverter runs from the battery again.
32	Equalization charge	**OFF**	Not used for LiFePO4.

Program numbers as in the SMS-5kW 24V series (same bottom panel and specifications); check against the paper manual in the box. After entering the settings, switch the inverter off and on again.

Which mode to choose

- **Backup during power cuts only (no panels):** 03 = “Grid first”, 05 = PNG. The inverter runs from the grid and the battery is always full; when the power goes out it switches to the battery automatically.
- **You have solar panels and want to save:** 03 = PBG, 05 = PNG (or OPV for solar only). Solar by day, battery at night, grid only when the battery has dropped to 25.0 V.

minertech.org · MinerTech® trademark · © 2017–2026, all rights reserved
+38 093 293 93 93 · +38 099 054 40 38 · Specialist Pavlo Leonidovych · strooks@gmail.com

- **Running on a generator:** 04 = GEN, 06 = 30 A or less, so as not to overload the generator.

How long it runs on battery

Load	Example	Runtime
100 W	router, lights, chargers	**≈ 20.7 h**
200 W	fridge + lights	**≈ 10.4 h**
300 W	fridge + lights + TV	**≈ 6.9 h**
500 W	fridge, laptop, pump	**≈ 4.1 h**
1000 W	boiler, kettle briefly, several appliances	**≈ 2.1 h**
2000 W	air conditioner, water heater, electric stove	**≈ 1.0 h**

Approximate: 90% of battery capacity and inverter efficiency ≈90%. A fridge runs in cycles, so the real runtime is longer.

Check after start-up

- Battery voltage on the display: ≈ 27.2–28.4 V when full, ≈ 25.0 V when discharged.
- Switch off the grid breaker: the load must keep running without interruption.
- After 10–15 min of operation, touch the terminals and cables: they must not be hot. If they heat up, a connection is loose or the cable is too thin.
- A battery below 23.2 V may have gone into BMS protection: charge it from the grid through the inverter.

Safety. Make all connections only with the battery, inverter and grid switched off. Do not short-circuit the battery terminals: the short-circuit current of LiFePO4 is very high. Do not install the inverter in a bathroom, outdoors in the rain or near flammable materials. If in doubt, contact an electrician.

Shutdown and maintenance

- Switch off in reverse order: load → grid → panels → inverter → DC breaker → battery.

- Every 3 months, check that the terminals are tight and the ventilation openings are clean.
- If you do not use the kit for a long time, charge the battery to 50–70% and switch it off.

minertech.org · MinerTech® trademark · © 2017–2026, all rights reserved
+38 093 293 93 93 · +38 099 054 40 38 · Specialist Pavlo Leonidovych · strooks@gmail.com