MinerTech Battery stand

RK-8

Eight-position shelving for rack battery modules, spaced for 3U cases. Maximum capacity on minimum floor space.



Main specifications

Dimensions (H × W × D)	**1600 × 560 × 810 mm**
Capacity	**8 positions on paired rails**
Module pitch	**≈ 174 mm (3U cases up to 150 mm high)**
Design load	**up to 300 kg**
Width between posts	**480 mm, 19″ ears (482 mm) fix to the front posts**
Options	**wheels**
Finish	**powder coating; standard: light grey, black RAL 9005 or white RAL 9016**
Frame warranty	**2 years**

What for: large 48V energy banks where compactness and order in the plant room matter.

minertech.org · MinerTech® trademark · © 2017–2026, all rights reserved
+38 093 293 93 93 · +38 099 054 40 38 · Specialist Pavlo Leonidovych · strooks@gmail.com

Why a battery rack

Order in the battery bank
each module sits on its own rails, not stacked on top of each other: housings are not crushed, and any module can be removed on its own.

Cooling
an air gap remains between modules, heat from the BMS and cells escapes freely, and the batteries last longer.

Service
front access to switches, RS485/CAN ports and power busbars; cables can run along the rear posts.

Safety
a steel frame on a level floor instead of wooden shelves; heavy modules at the bottom, low centre of gravity.

Scalability
buy one or two modules now and add more to the same rack when you need more capacity.

What fits

- up to 6 modules 51.2V 100Ah of 43–44 kg (≈ 264 kg, 30.7 kWh) within 300 kg
- 8 modules if each weighs no more than 37 kg

Not suitable: 8 modules of 43–44 kg (≈ 350 kg) exceed the rated 300 kg: for such an assembly use two RK-5 racks or a reinforced version on request.

Compatibility is checked against the dimensions of inverters and batteries in our catalogue. If you have other equipment, send us its dimensions: we will pick a stand or make one to fit.

Expert opinion

Eight positions leave room for future expansion, but mind the weight: 300 kg is six modules of 43–44 kg. For a full eight modules of that weight we advise two RK-5 racks or a reinforced version on request.

minertech.org · MinerTech® trademark · © 2017–2026, all rights reserved
+38 093 293 93 93 · +38 099 054 40 38 · Specialist Pavlo Leonidovych · strooks@gmail.com

Drawing

MinerTech Стелаж RK-8 · креслення — розміри в мм

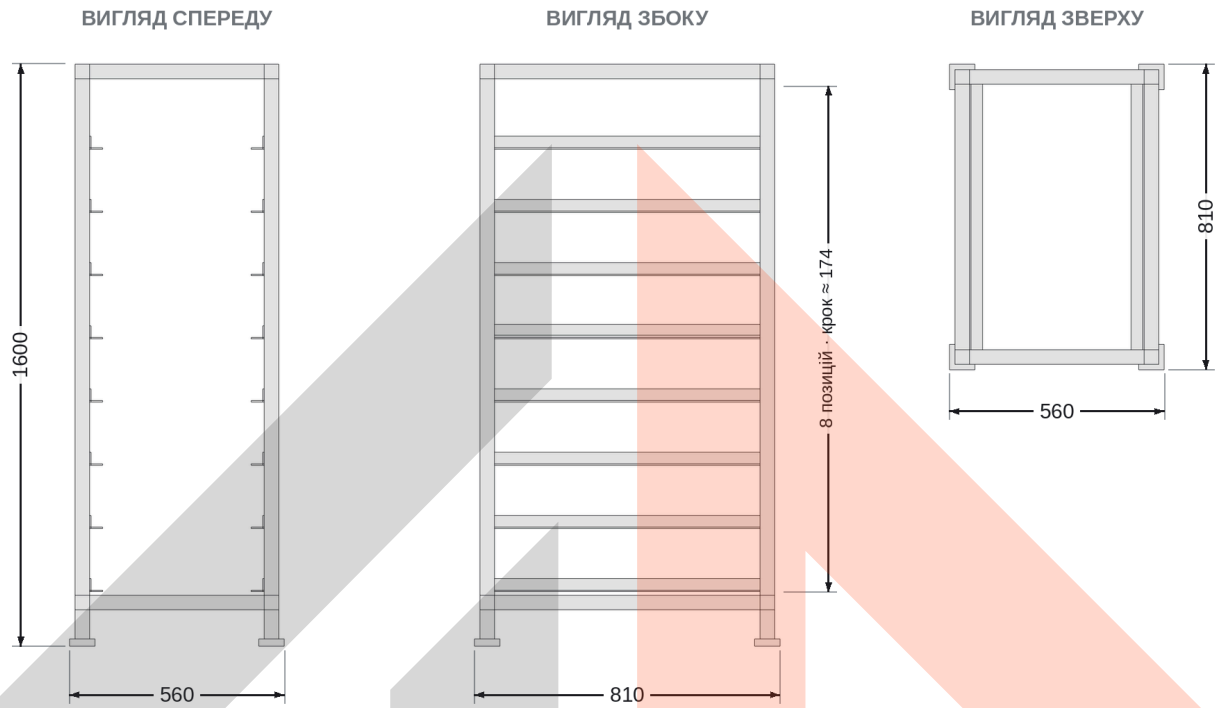

Габарити (В × Ш × Г)	**1600 × 560 × 810 мм**
Місткість	**8 позицій на парних напрямних**
Крок модулів	**≈ 174 мм (корпуси 3U до 150 мм заввишки)**
Розрахункове навантаження	**до 300 кг**
Ширина між стійками	**480 мм, вуха 19″ (482 мм) кріпляться до фронтальних стійок**

Нестандартні розміри — під ваше обладнання

External dimensions in millimetres. Manufacturing tolerance ±5 mm. Non-standard sizes to fit your equipment.

minertech.org · MinerTech® trademark · © 2017–2026, all rights reserved
+38 093 293 93 93 · +38 099 054 40 38 · Specialist Pavlo Leonidovych · strooks@gmail.com

Fitting, safety

- Fill the rack from the bottom up; fix the front ears of the modules with M6 screws.
- Take the jumpers between modules and the communication cable (RS485/CAN) from the battery kit; power cables to the inverter through a separate DC breaker.
- With a load over 200 kg, place the rack on a concrete or tiled floor, not on a wooden joist floor.
- Connect the frame to earth (PE conductor from 6 mm²).

Build and colour

The frame is welded from steel box section; welds are cleaned, and the structure is powder coated and oven cured. The coating is dense and resistant to moisture, scratches and UV. Standard colours are black RAL 9005 and white RAL 9016; any other RAL colour and non-standard sizes for your equipment are made to order. Frame warranty: 2 years.

RAL 9005 RAL 9016 RAL 7016 RAL 7035 RAL 9006 RAL 8017 RAL 5010

Colours on screen and in print are approximate.

Supplied

Welded stand frame, powder coated. The inverter, batteries, switchgear and cables in the images are shown as examples and are not included.



